





















worldtrade.

worldtrade.est@gmail.com






37253071505

Item No	Picture	Description	UNIT Price	PACKING	Note
HXL-2345		<p>Color Temperature: 6000K Material: Diecast aluminum housing Lens material: PMMA Mounting Bracket: Stainless Steel Opitonal Beam: spot(8 degree) beam 30000 hours above life time Dimensions: 7.0 inch Certificates:CE, RoHs. IP67. LED Power: 45W Operating Voltage: 10-30V DC Waterproof rate: IP 67 3pcs*15w high intensity CREE LEDs Optional Color: Black Color Temperature: 6000K Material: Diecast aluminum housing Lens material: PMMA</p>	95.eur		
HXL-2460		<p>Color Temperature: 6000K Material: Diecast aluminum housing Lens material: PMMA Mounting Bracket: Stainless Steel Opitonal Beam: spot(8 degree) beam 30000 hours above life time Dimensions: 7.0 inch Certificates:CE, RoHs. IP67. LED Power: 60W Operating Voltage: 10-30V DC Waterproof rate: IP 67 6pcs*10w high intensity CREE LEDs Optional Color: Black Color Temperature: 6000K Material: Diecast aluminum housing Lens material: PMMA</p>	90.eur		
HXL-2745		<p>Color Temperature: 6000K Material: Diecast aluminum housing Lens material: PMMA Mounting Bracket: Stainless Steel Opitonal Beam: spot(5 degree) beam 30000 hours above life time Dimensions: 5.0 inch Certificates:CE, RoHs. IP67. LED Power: 45W Operating Voltage: 10-30V DC Waterproof rate: IP 67 9pcs*5w high intensity CREE LEDs Optional Color: Black Color Temperature: 6000K Material: Diecast aluminum housing Lens material: PMMA</p>	75.eur		
HXL-2565		<p>Color Temperature: 6000K Material: Diecast aluminum housing Lens material: PMMA Mounting Bracket: Stainless Steel Opitonal Beam: spot beam 30000 hours above life time Dimensions: 6.0 inch Certificates:CE, RoHs. IP67. LED Power: 65W Operating Voltage: 10-30V DC Waterproof rate: IP 67 13pcs*5w high intensity Epsitar LEDs Optional Color: Black Color Temperature: 6000K Material: Diecast aluminum housing Lens material: PMMA</p>	75.eur		


<p>HXL-2290</p>			<p>Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Stainless Steel Opitonal Beam: 10 degree 30000 hours above life time Dimensions: 5.2 inch Certificates:CE, RoHs, IP67. LED Power: 90W Operating Voltage: 10-30V DC Waterproof rate: IP 67 9pcs*10w high intensity CREE LEDs Optional Color: Black,White Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC</p>	<p>105.eur</p>		
<p>HXL-2260</p>			<p>Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Stainless Steel Opitonal Beam: 10 degree 30000 hours above life time Dimensions: 5.2 inch Certificates:CE, RoHs, IP67. LED Power: 60W Operating Voltage: 10-30V DC Waterproof rate: IP 67 6pcs*10w high intensity CREE LEDs Optional Color: Black,White Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC</p>	<p>90.eur</p>		
<p>HXL-0340</p>			<p>Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA Mounting Bracket: Stainless Steel Opitonal Beam: spot beam 30000 hours above life time Dimensions: 4.7 inch Certificates:CE, RoHs, IP67. LED Power: 40W Operating Voltage: 10-30V DC Waterproof rate: IP 67 4pcs*10w high intensity CREE LEDs Optional Color: Black Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA</p>	<p>50.eur</p>		
<p>HXL-1042S</p>			<p>Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Stainless Steel Opitonal Beam: 8 degree 30000 hours above life time Dimensions: 4.5 inch Certificates:CE, RoHs, IP67. LED Power: 42W Operating Voltage: 10-30V DC Waterproof rate: IP 67 14pcs*3w high intensity Epsitar LEDs Optional Color: Black,White Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC</p>	<p>38.eur</p>		
<p>HXL-0370</p>			<p>Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Stainless Steel Opitonal Beam: Spot/Flood/Combo 30000 hours above life time Dimensions: 6.0 inch Certificates:CE, RoHs, IP67. LED Power: 70W Operating Voltage: 10-30V DC Waterproof rate: IP 67 7pcs*10w high intensity CREE LEDs Optional Color: Black,White Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC</p>	<p>95.eur</p>		

HXL-0445			<p>Optional Color: Black,White Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Stainless Steel Opitonal Beam: Spot/Flood 30000 hours above life time Dimensions: 5.5 inch Certificates:CE, RoHs, IP67. LED Power: 45W Operating Voltage: 9-80V DC Waterproof rate: IP 67 9pcs*5w high intensity CREE LEDs Optional Color: Black,White Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC</p>	75.eur		
HXL-0460			<p>Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Stainless Steel Opitonal Beam: Spot/Flood 30000 hours above life time Dimensions: 7.0 inch Certificates:CE, RoHs, IP67. LED Power: 60W Operating Voltage: 9-80V DC Waterproof rate: IP 67 12pcs*5w high intensity CREE LEDs Optional Color: Black,White Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC</p>	95.eur		
HXL-0451			<p>Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA Mounting Bracket: Stainless Steel Opitonal Beam: 60 / 30 degree 30000 hours above life time Dimensions: 6.3 inch Certificates:CE, RoHs, IP67. LED Power: 51W Operating Voltage: 10-30V DC Waterproof rate: IP 67 5pcs*3w high intensity Epsitar LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA</p>	45.eur		
HXL-3745			<p>Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA Mounting Bracket: Stainless Steel Opitonal Beam: Combo Beam 30000 hours above life time Dimensions: 6.0 inch Certificates:CE, RoHs, IP67. LED Power: 45W Operating Voltage: 10-30V DC Waterproof rate: IP 67 15pcs*3w high intensity CREE LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA</p>	45.eur		
HXL-1545			<p>Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA Mounting Bracket: Stainless Steel Opitonal Beam: 60 / 30 degree 30000 hours above life time Dimensions: 6.0 inch Certificates:CE, RoHs, IP67. LED Power: 45W Operating Voltage: 10-30V DC Waterproof rate: IP 67 15pcs*3w high intensity Epsitar LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA</p>	45.eur		



<p>HXL-1133</p>			<p>Optional Color: Black,white Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA Mounting Bracket: Stainless Steel Opitonal Beam: 60 / 30 degree 30000 hours above life time Dimensions: 6.0 inch Certificates:CE、 RoHs、 IP67. LED Power: 33W Operating Voltage: 10-30V DC Waterproof rate: IP 67 11pcs*3w high intensity Epsitar LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA Mounting Bracket: Stainless Steel</p>	<p>45.eur</p>		
<p>HXL-0345</p>			<p>LED Power: 45W Operating Voltage: 10-30V DC Waterproof rate: IP 67 15pcs*3w high intensity Epsitar LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA Mounting Bracket: Stainless Steel Opitonal Beam: 60 / 30 degree 30000 hours above life time Dimensions: 6.6 inch Certificates:CE、 RoHs、 IP67</p>	<p>36.eur</p>		
<p>HXL-0336</p>			<p>LED Power: 36W Operating Voltage: 10-30V DC Waterproof rate: IP 67 12pcs*3w high intensity Epsitar LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PMMA Mounting Bracket: Stainless Steel Opitonal Beam: 30 degree 30000 hours above life time Size: 110mm*60mm*56mm Certificates:CE、 RoHs、 IP67</p>	<p>36.eur</p>		
<p>HXL-R02</p>			<p>LED Power: 50W Operating Voltage: 10-30V DC Waterproof rate: IP 67 10pcs*5w high intensity CREE LEDs Optional Color: Black,White Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Stainless Steel Opitonal Beam: Spot 30000 hours above life time Dimensions:7.0 inch . Certificates:CE、 RoHs、 IP67</p>	<p>150.eur</p>		
<p>HXC-001</p>						

HXC-002

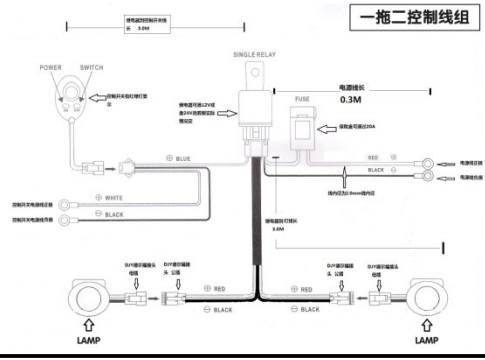

10.eur

--	--